



### **SPECIFICATIONS**

membrane control with vapor and air temperatures to be adjusted in 1°F increments. Processor controlled calibration-free thermistors, accurate within +/- 2°F and accommodates softwal updates via USB. Utilizes Controlled Vapor Technology (patent #5,494,690) as a method and apparatus for holding hot foods, consisting of an air heater and water heater to establish ideal water vapor content that is in relation with the moistness characteristics for the food.	adjusted in 1°F increments. Processor of thermistors, accurate within +/- 2°F and updates via USB. Utilizes Controlled Var #5,494,690) as a method and apparatus consisting of an air heater and water he water vapor content that is in relation v	emperatures to be ontrolled calibration-free laccommodates software or Technology (patent sfor holding hot foods, eater to establish ideal
--	--	--

#### Construction

Construction						
Control	Electronic membrane control allows precise control of vapor temperature and air temperature.  1 Steam Table Pan (12" x 20" x up to 6") 2 Half Steam Table Pan (12" x 10" x up to 6") 3 Third Steam Table Pan (12" x 7" x up to 6") 1 Gastronorm Pan 1/1					
Capacity						
Weight Tolerance	20 lbs. (9.07 kg.) per drawer.					
Electrical	Supplied with 84" (2,134 mm) (minimum) power cord and plug.					
Drawers	Accepts one full steam table pan (up to 6" (152 mm) deep), two half steam table pans, three third steam table pans, or one 1/1 gastronorm pans. Easy to remove and replace.					
Materials	To be commercial and institutional grade stainless steel interior and exterior to provide ease of cleaning and long service life with reasonable use and care. Full-perimeter insulation.					
Water Fill	Operated manually with easy fill spout. Low mineral potable water is recommended, otherwise use deionizer/demineralizer to minimize corrosive damage.					
Installation Requirements	Units to be installed with 2" (51mm) clearance on sides and may not be installed within proximity to anything emitting heat that would allow the exterior of the Winston cabinet to					

requirements specific to the location.



# HBB0D1 CVAP HOLD/SERVE DRAWER **FANLESS (SHOWN)**













CVap® Hold/Serve Drawers are designed for high quality holding and serving of a wide variety of menu items for extended times. They are ideal for holding, warming, and serving.




### WINSTON FOODSERVICE

exceed surface temperatures of >200°F. Refer to owner's manual for specific installation requirements. Generally, this equipment is not required to be installed under Type 1 or Type 2 Hoods; however, check local health and fire codes for

JOB





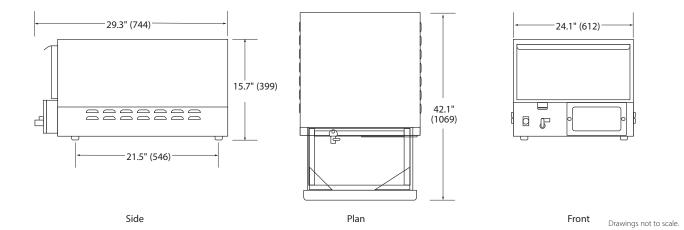

capacity	size in (mm)	volts	hertz	ph	amps	watts	nema	ship wt. lb (kg)	ship cube	
		US / CANADA								
1 STP 2 Half STP 3 Third STP 1 GP 1/1	H½= 15.7" (399) H2= 17.2" (437) H3= 18.9" (480) H4= 19.7" (500)	120	60	1	12.0	1440	US 5-15P (**) CAN 5-20P (**)	110 (50)	8.7 (0.25)	
	` ,	N INTERNATIONAL								
Accepts up to 6" H6= 21.7" (551) deep W= 24.1" (612) D= 29.3" (744)	230*	50/60	1	6.3	1440	N/A	110 (50)	call factory		

STP= Steam Table Pan (12" x 20" x 2.5") • GP= Gastronorm Pan • H½= bumper feet • H2=2"legs H4= 4" legs • H6= 6" legs • H3= 3" casters

# **CONTROLLED VAPOR TECHNOLOGY**, (U.S. patent # 5,494,690) establishes that the water vapor content in the drawer is the same as that of the food. This unique process controls moisture evaporation and saturation, so crisp foods stay crisp, and moist foods stay moist.

**EASY-TO-USE CONTROLS** Membrane control with vapor and air temperatures to be adjusted in 1°F increments. Processor controlled calibration-free thermistors, accurate within +/- 2°F and accommodates software updates via USB.

# **BUILT TO LAST WITH QUALITY CRAFTSMANSHIP**, Built to last with quality craftsmanship, high grade stainless steel construction and full perimeter insulation.

## ALLOWS FOR BETTER CONTROL OF FOOD QUALITY,

hold your menu items at just-cooked quality and precise serving temperatures for extended times.

**INDUSTRY COMPLIANT**, CVap equipment complies with domestic and international requirements such as UL, C-UL, UL Sanitation, CE, and others.

**WARRANTY**. Limited one year warranty. Warranty disclaimer for failure to clean. Ask for complete warranty disclosure.

### SPECIFY THE FOLLOWING WHEN ORDERING:

Standard (No additional cost):

- 1. Voltage: 120V
- \*Inquire about additional international voltages available.
- 2. Bumper feet ½" (13mm)

### **Optional** (Additional cost):

- 1. 2" (51mm) legs
- 2. 4" (102 mm) legs
- 3. 6" (152mm) legs
- 4. 3" (76mm) casters
- 5. 5" (127mm) casters
- 6. 1.5" (38.1mm) wheels
- 7. Control cover
- 8. Extended Warranty

### Accessories & Supplies (Additional cost):

PS2212 Drawer Tray Perforated-D AC1018 Drawer Trim Kit

FOR WINSTON SERVICE PARTS, ACCESSORIES, AND SUPPLIES ONLINE!

foodservice.winstonind.com/parts-supplies

