

CVap® Hold/Serve Drawer



SPECIFICATIONS

Short Form Specs	Winston CVap Hold/Serve Drawer, model HBB5N1 with membrane control with vapor and air temperatures to be adjusted in 1°F increments. Processor controlled calibration-free thermistors, accurate within +/- 2°F and accommodates software updates via USB. Utilizes Controlled Vapor Technology (patent #5,494,690) as a method and apparatus for holding hot foods, consisting of an air heater and water heater to establish ideal water vapor content that is in relation with the moistness characteristics for the food.
Construction	
Control	Electronic membrane control allows precise control of vapor temperature and air temperature.

Con	trol	Electronic membrane control allows precise control of vapor temperature and air temperature.
Cap	acity	1 Steam Table Pan (12" x 20" x 6") 2 Half Steam Table Pan (12" x 10" x 6") 3 Third Steam Table Pan (12" x 6.7" x 6") 1 Gastronorm Pan 1/1 Accepts up to 6" deep pans
Wei	ght Tolerance	20 lbs. (9.07 kg) per drawer.
Elec	ctrical	Supplied with 84" (2,134 mm) (minimum) power cord and plug.
Drav	wers	To accept one full steam table pan (6" (152 mm) deep), two half

Electrical	Supplied with 84" (2,134 mm) (minimum) power cord and plug.
Drawers	To accept one full steam table pan (6" (152 mm) deep), two half steam table pans, three third steam table pans, or one 1/1 gastronorm pan. Easy to remove and replace.
Materials	To be commercial and institutional grade stainless steel interior

to provide ease of cleaning and long service life with reasonable
use and care.

Evaporator Holds approximately .8 gallons (3L) of water.

Water Fill Operated manually with easy fill spout.. Low mineral potable water is recommended, otherwise use deionizer/demineralizer

to minimize corrosive damage.

Installation Requirements

Units to be installed with 2" (51mm) clearance on sides and may not be installed within proximity to anything emitting heat that would allow the exterior of the Winston cabinet to exceed surface temperatures of >200°F. Refer to owner's manual for specific installation requirements. Generally, this equipment is not required to be installed under Type 1 or Type 2 Hoods; however, check local health and fire codes for

requirements specific to the location.



HBB5N1

CVAP HOLD/SERVE DRAWER

ONE DRAWER MODEL
WITH FAN (SHOWN)















variety of menu items for extended times. They are ideal for holding, warming, and serving.



JOB

ITEM#



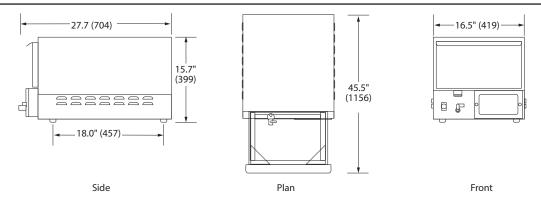

								Drawings_	not to scale.
capacity	size in (mm)	volts	hertz	ph	amps	watts	nema	ship wt. Ib (kg)	ship cube
						US	/ CANADA		
1 STP 2 Half STP 3 Third STP 1 GP 1/1	H½= 15.7" (399) H2= 17.2" (437) H3= 18.9" (480) H4= 19.7" (500) H6= 21.7" (551) W= 16.5" (419) D= 27.7" (704)	120	60	1	13.1		US 5-15P (1) CAN 5-20P (1)	95 (43)	6.2 (0.18)
		INTERNATIONAL							
		230*	50/60	1	6.8	1572	N/A	95 (43)	call factory

 $STP=Steam\ Table\ Pan\ (12"\ x\ 20"\ x\ 2.5"\ (up\ to\ 6") \cdot GP=Gastronorm\ Pan\ \cdot\ H' \\ \text{$^+$} bumper\ feet\ \cdot\ H2=2"legs\ H4=4"legs\ \cdot\ H6=6"legs\ \cdot\ H3=3"\ casters$

CONTROLLED VAPOR TECHNOLOGY (U.S. patent

5,494,690) establishes that the water vapor content in the drawer is the same as that of the food. This unique process controls moisture evaporation and saturation, so crisp foods stay crisp, and moist foods stay moist.

EASY-TO-USE CONTROLS Membrane control with vapor and air temperatures to be adjusted in 1°F increments. Processor controlled calibration-free thermistors, accurate within +/- 2°F and accommodates software updates via USB.

BUILT TO LAST WITH QUALITY CRAFTSMANSHIP, Built to last with quality craftsmanship, high grade stainless steel construction and full perimeter insulation.

ALLOWS FOR BETTER CONTROL OF FOOD QUALITY,

Features radial fan for improved food quality with frequent drawer openings, full perimeter drawer gaskets, and digital readout for water temperature.

INDUSTRY COMPLIANT, CVap equipment complies with domestic and international requirements such as UL, C-UL, UL Sanitation, CE, MEA, and others.

WARRANTY. Limited one year warranty. Warranty disclaimer for failure to clean. Ask for complete warranty disclosure.

SPECIFY THE FOLLOWING WHEN ORDERING:

Standard (No additional cost):

- 1. Voltage: 120V
- *Inquire about additional international voltages available.
- 2. Bumper feet 1/2" (13mm)

Optional (Additional cost):

- 1. 2" (51mm) legs
- 2. 4" (102 mm) legs
- 3. 6" (152mm) legs
- 4. 3" (76mm) casters 5. 5" (127mm) casters
- 6. 1.5" (38.1mm) wheels
- 7. Control cover
- 8. Extended Warranty

Accessories & Supplies (Additional cost):

PS3177 Drawer Tray Perforated-N AC1023 Drawer Trim Kit

FOR WINSTON SERVICE PARTS, ACCESSORIES, AND SUPPLIES ONLINE!

foodservice. winston ind. com/parts-supplies

