

SPECIFICATIONS

Short Form Specs	Winston CVap Hold/Serve Drawer, model HBB0N2 with electronic differential controls to provide food temperature control from 90 to 180°F (32 to 82°C) and maintain food texture with settings from 90 to 180°F (32 to 82°C). 250°F (121°C) maximum drawer temperature. Utilizes Controlled Vapor Technology (patent #5,494,690) as a method and apparatus for holding hot foods, consisting of an air heater and water heater
	to establish ideal water vapor content that is in relation with the moistness characteristics for the food.

Construction

Construction						
Control	Electronic differential control allows precise control of food temperature and food texture.					
Capacity	2 Steam Table Pan (12" x 20" x up to 6") 4 Half Steam Table Pan (12" x 10" x up to 6") 6 Third Steam Table Pan (12" x 7" x up to 6") 2 Gastronorm Pan 1/1					
Weight Tolerance	20 lbs. (9.07 kg.) per drawer.					
Electrical	Supplied with 84" (2,134 mm) (minimum) power cord and plu					
Drawer	Accepts two full steam table pans (up to 6" deep), four half steam table pans, six third steam table pans, or two 1/1 gastronorm pans. Easy to remove and replace.					
Materials	Interior to be stainless steel to provide ease of cleaning and long service life with reasonable use and care.					
Water Fill	Operated manually with easy fill spout. Low mineral potable water is recommended, otherwise use deionizer/demineralizer to minimize corrosive damage.					
Installation Requirements	Units to be installed with 2" (51mm) clearance on sides and					

requirements specific to the location.

may not be installed within proximity to anything emitting

heat that would allow the exterior of the Winston cabinet to

exceed surface temperatures of >200°F. Refer to owner's manual for specific installation requirements. Generally, this equipment is not required to be installed under Type 1 or Type 2 Hoods; however, check local health and fire codes for



HBB0N2

CVAP HOLD/SERVE DRAWER Electronic Differential Controls

TWO DRAWER MODEL FANLESS (SHOWN)











CVap® Hold/Serve Drawers are designed for high quality holding and serving of a wide variety of menu items for extended times. They are ideal for holding, warming, and serving.




WINSTON FOODSERVICE

JOB

ITEM#



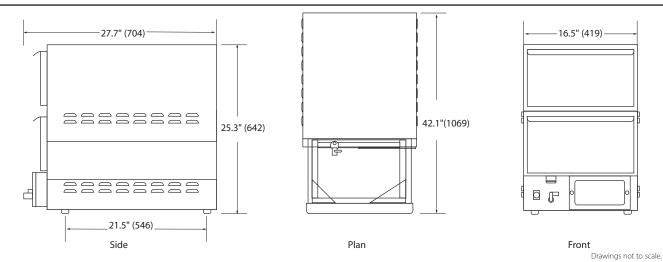

capacity	size in (mm)	volts	hertz	ph	amps	watts	nema	ship wt. lb (kg)	ship cube		
		US/CANADA									
2 STP 4 Half STP 6 Third STP 2 GP 1/1	H½= 25.3" (642) H2= 27.3" (693) H3= 29.1" (739) H4= 29.3" (744)	120	60	1	12.0	1440	US 5-15P (1) CAN 5-20P (1)	125 (57)	9.5 (0.27)		
2 01 1/1	` '	INTERNATIONAL									
Accepts up to 6" deep	H6= 31.3" (795) W= 16.5" (419) D= 27.7" (704)	230*	50/60	1	6.3	1440	N/A	125 (57)	call factory		

 $STP= Steam\ Table\ Pan\ (12"\ x\ 20"\ x\ up\ to\ 6") \cdot GP= Gastronorm\ Pan\ \cdot\ H1/2= bumper\ feet\ \cdot\ H2=2"legs\ H4=4" legs\ \cdot\ H6=6" legs\ \cdot\ H3=3" casters$

CONTROLLED VAPOR TECHNOLOGY (U.S. patent

5,494,690) establishes that the water vapor content in the drawer is the same as that of the food. This unique process controls moisture evaporation and saturation, so crisp foods stay crisp, and moist foods stay moist.

EASY-TO-USE CONTROLS Two electronic differential control key sets are easy to understand and reliable. These controls never need field calibration.

FOOD TEMP KEYS allow control of food temperature from 90 to 180°F (32 to 82°C).

FOOD TEXTURE KEYS maintain just-cooked texture. Set near food temperature for moist foods, or set higher for crisp foods. 250°F (121°C) maximum cabinet temperature.

BUILT TO LAST WITH QUALITY CRAFTSMANSHIP, high grade stainless steel construction and full perimeter insulation.

ALLOWS FOR BETTER CONTROL OF FOOD QUALITY, hold your menu items at just-cooked quality and precise serving temperatures for extended times.

INDUSTRY COMPLIANT, CVap equipment complies with domestic and international requirements such as UL, C-UL, UL Sanitation, CE, and others.

WARRANTY. Limited one year warranty. Warranty disclaimer for failure to clean. Ask for complete warranty disclosure.

SPECIFY THE FOLLOWING WHEN ORDERING:

Standard (No additional cost):

- 1. Voltage: 120V
- *Inquire about additional international voltages available.
- 2. Bumper feet ½" (13mm)

Optional (Additional cost):

- 1. 2" (51mm) legs
- 2. 4" (102 mm) legs
- 3. 6" (152mm) legs
- 4. 3" (76mm) casters
- 5 Control cover
- 6. Extended Warranty

Accessories & Supplies (Additional cost):

PS3177 Drawer Tray Perforated-N

FOR WINSTON SERVICE PARTS, ACCESSORIES, AND SUPPLIES ONLINE! foodservice.winstonind.com/parts-supplies

