
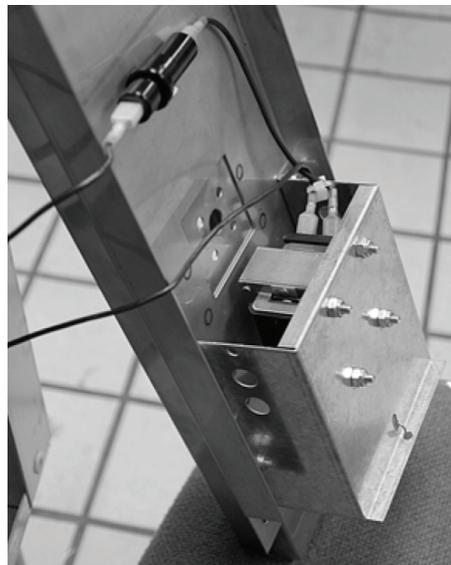


# Install PS2599 Solenoid Inline Fuse INSTRUCTION MANUAL

**TOOL(S) NEEDED:** • Phillips screwdriver

## INSTRUCTIONS:

1. Disconnect fryer from power supply or turn circuit breaker off.
2. Remove rear, right-hand access panel.
3. Disconnect one of the vent solenoid wires from the vent solenoid terminal. (Either wire may be used.)
4. Connect the wire lead from the fuse kit to the open vent solenoid terminal.
5. Connect the vent solenoid wire to the terminal at the other end of the fuse kit.
6. Replace the rear, right-hand access panel. (The fryer is now ready to be put back into service.)

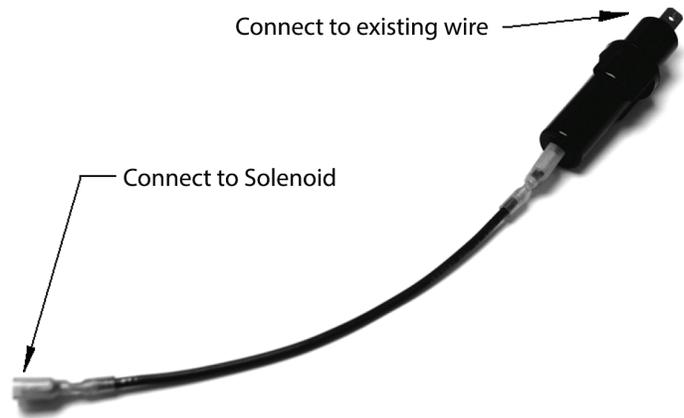

**Buy Winston service parts online!**  
Factory direct at [www.winstonparts.com](http://www.winstonparts.com)