

Gasket Installation for HA8503 UHB Cabinet

INSTRUCTION MANUAL

TOOL(S) NEEDED

- Phillip's screwdriver
- 7/16" Wrench

INSTRUCTIONS:

1. Open door and remove door from cabinet by pulling it directly up. (Figure 1)
2. Lay door on a flat surface. (Figure 2)
3. Using a Phillip's screwdriver and a 7/16" wrench, remove both the top and bottom hinge. (Figure 3)
4. Using a Phillip's screwdriver and a 7/16" wrench, remove latch assembly. (Figure 4)
5. Remove old gasket from door frame. (Figure 5)



Figure 1



Figure 2



Figure 3



Figure 4



Figure 5

Buy Winston service parts online!
Factory direct at www.winstonparts.com

6. Lay new gasket on door frame. Starting in one corner, press gasket into door frame. Avoid stretching the gasket out. Push the gasket directly into frame. **DO NOT RUN FINGER DOWN THE SIDE! This will stretch out the gasket.** (Figures 6, 7, 8, & 9)
7. Continue pressing the gasket into door frame until all sides are secured. Be careful not to overstretch the gasket. (Figure 10)
8. Inspect all sides of the door to ensure that gasket is secured and flush. (Figure 11)
9. Using a Phillip's screwdriver and a 7/16" wrench, reattach the door latch assembly. (Figure 12)
10. Using a Phillip's screwdriver and a 7/16" wrench, reattach the door hinges. (Figure 13)
11. Reattach the door to the cabinet. (Figure 14)




Figure 6




Figure 7



Figure 8

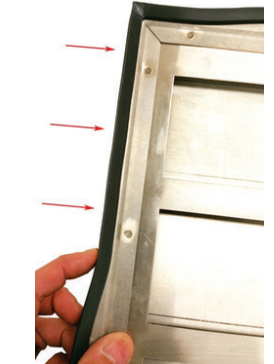


Figure 9



Figure 10



Figure 11



Figure 12



Figure 13



Figure 14

Buy Winston service parts online!
Factory direct at www.winstonparts.com