

SV1302 & SV1303 Installation Instructions

TOOL(S) NEEDED

- Phillips Screwdriver



DANGER: Electrical Hazard

Power off and unplug the unit before installing the SV1302 or SV1303 kit.

Drain all the water from the unit before installing the SV1302 or SV1303 kit.



1. Remove the drawer (s). Remove the three screws from the bottom of one side of the drawer unit.



2. Set the unit on the side where the three screws were removed.

For Winston service parts, accessories, and supplies online!
foodservice.winstonind.com/parts-supplies




3. Remove the three screws from the bottom back.




4. Remove the three screws from the topside bottom.




5. Remove the screw from the drawer bottom. Remove the drawer bottom.

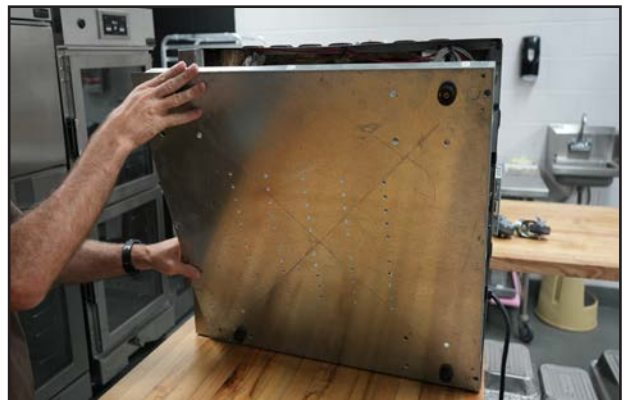

For Winston service parts, accessories, and supplies online!
foodservice.winstonind.com/parts-supplies

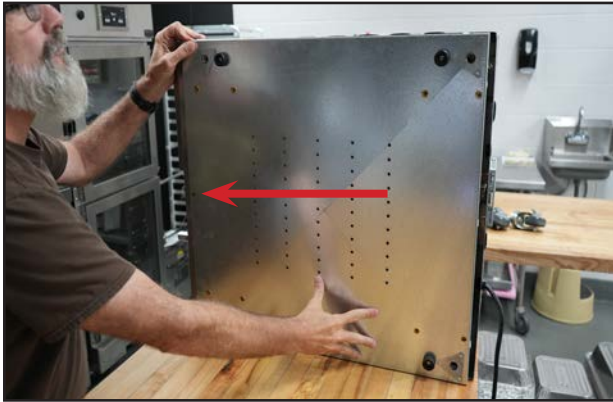

6. Insert the new bottom into place. Verify that the bottom screw hole is towards the front. Replace the bottom screw.

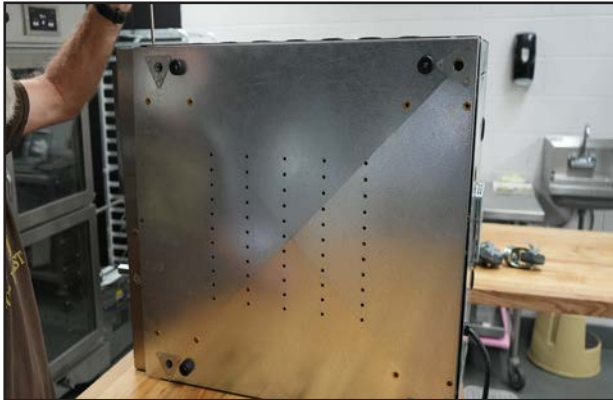

7. Replace the topside screws and the backside screws.



8. Lay the unit back down on it's bumpers and replace the three side screws.

For Winston service parts, accessories, and supplies online!
foodservice.winstonind.com/parts-supplies