

CVap® HOV3-14UV

Updated CVap Holding Cabinets are now approved for the Pizza Hut system and deliver serious performance. CVap Holding Cabinets include HACCP data download and convection fan. They are perfect for keeping pizza hot and fresh, ready for service or delivery.

**Customized
Serial Tag**

Pass-Through Doors

**10 Sheet Metal
Shelves**



**APPROVED
FOR THE
PIZZA HUT
SYSTEM**

Published for




HOV3-14UV
(shown with pass-through option)



CVap® Holding Cabinets

HOV3-14UV Holding Cabinet

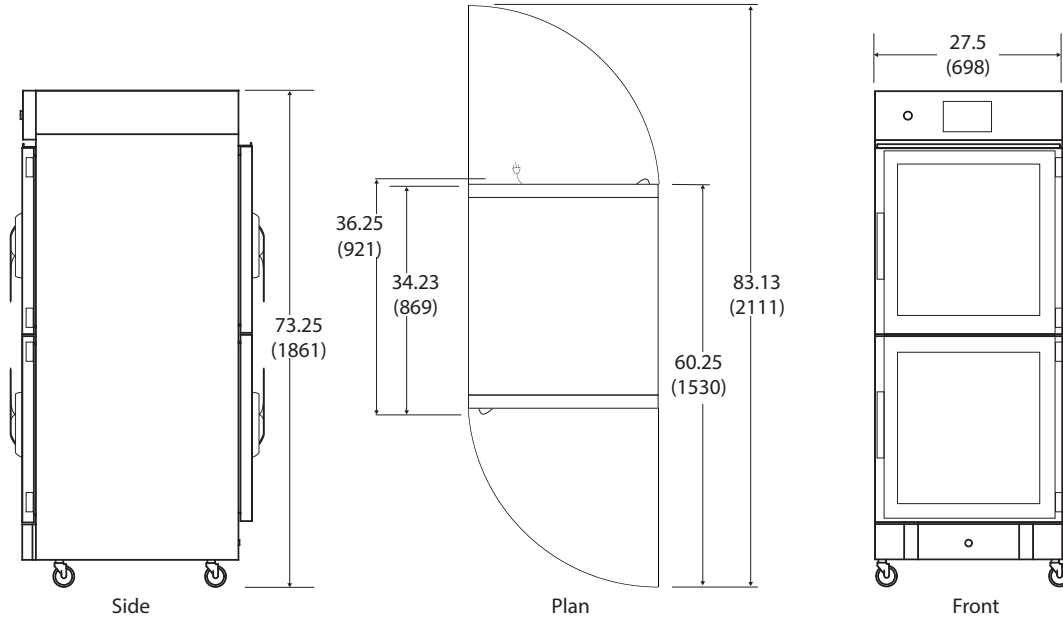

Pass-through option shown.
Drawings may not be to scale.

Model #	Sheet Metal Racks (18" x 26")	Exterior Dimensions				Electrical					Door Configuration	
		Height IN.(MM)	Depth IN.(MM)	Width IN.(MM)	Casters	Volts	Phase	Watts	Amps	NEMA*	Door Type	Hinge
HOV3-14UV	10	73.25(1861)	34.23(869)	27.50(698)	3"	120	1	2292	19.1	L5-30P	Pass-Through Glass Doors	Front Right/Back Left or Front Left/Back Right
											Non-Pass-Through Glass Doors	Left Hinge

*NEMA - US orders supplied with 84" (2134mm) (minimum) power cord and plug. The input average of current did not exceed the allowable amperage for the circuit listed. International voltages available. International order shipped with cord, but without plug.

Warranty

PARTS	LABOR
Length: 2 Years	1 Year
Expires: 02/2025	02/2024

For any repairs, even after warranty expiration date, first call 1-800-234-5286

Model No: **CVAP** Serial No: **20010101-001**

Scan to Register

Winston 2345 Carton Drive | Louisville, Kentucky 40299 USA
foodservice winstonfoodservice.com | 800.234.5286 | +1.502.495.5400 LA001AR107 Rev 02

Pizza Hut Warranty Label

SPECIFY THE FOLLOWING WHEN ORDERING:

Standard (No additional cost):

- Configuration Preference: Pass-through or non-pass-through
- Door Preference:
 - Pass-through available with front right/back left or front left/back right door hinges
 - Non-pass-through available with left hinge

INSTALLATION REQUIREMENTS: Units to be installed with 2" (51mm) clearance on sides and may not be installed within proximity to anything emitting heat that would allow the exterior of the Winston cabinet to exceed surface temperatures of >200°F. Refer to owner's manual for specific installation requirements.

INDUSTRY COMPLIANT: Equipment complies with domestic and most international requirements; such as UL, C-UL, UL Sanitation, CE, MEA, EPA202, and others.

