


Install Water Fill Shunt

INSTRUCTION MANUAL

TOOL(S) NEEDED

- Phillips screwdriver

KIT CONTENTS:

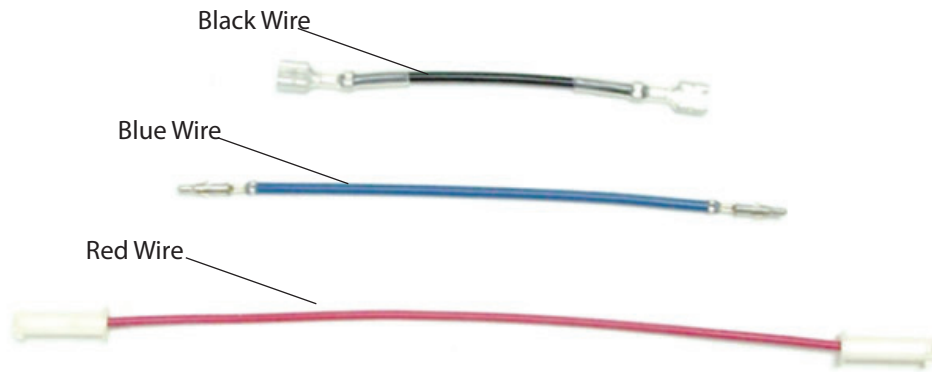

INSTRUCTIONS:


1. **DANGER:** Disconnect appliance from power by unplugging power cord or turning off circuit breaker.

2. Remove top panel to access internal wiring.

MODELS WITH BLACK AND WHITE WIRES IN PIN 3 AND PIN 6 OF 6 PIN CONNECTOR:

3. Connect the black wire to the black and white wires on the 6 pin connector located under the relays as shown.


4. Pull back on terminal to ensure that you have a good connection.

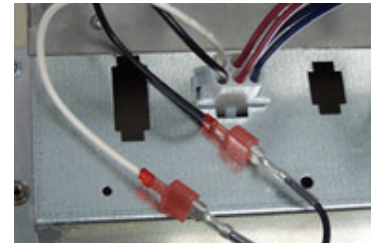

MODELS WITH NO WIRES IN PIN 3 AND PIN 6 OF 6 PIN CONNECTOR:

5. Push the terminal into the two open positions on the 6 pin connector located under the relays as shown.


6. Pull back on terminal to ensure that you have a good connection.

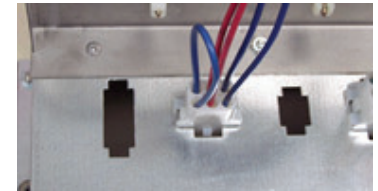

MODELS WITH BLACK AND RED WIRES IN PIN 3 AND PIN 6 OF 6 PIN CONNECTOR:

7. Connect the red wire to the black and red wires on the 6 pin connector located under the relays as shown.

8. Pull back on terminal to ensure that you have a good connection.

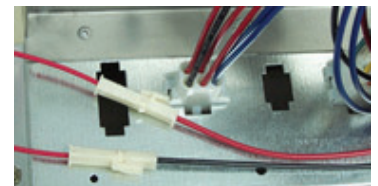

Buy Winston service parts online!
Factory direct at www.winstonparts.com