

Flip Door Installation INSTRUCTION MANUAL

TOOL(S) NEEDED

- Phillip's head screwdriver

1. Open existing door and lift door up and out of the cabinet hinges (Figure 1).
2. Using a Phillip's head screwdriver, remove the strike plate (Figures 2 & 3).
3. Using a Phillip's head screwdriver, attach flip door latch to cabinet. Ensure that the bottom half plate is in front of the top half plate (Figures 4, 5, & 6).



Figure 1

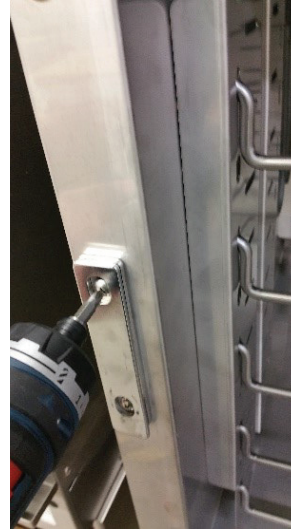


Figure 2



Figure 3

Correct

Incorrect



Figure 4



Figure 5



Figure 6

Buy Winston service parts online!
Factory direct at www.winstonparts.com

4. Insert flip door hinges down into cabinet hinges (**Figure 7**).
5. Close flip door and verify that door latches and seals. Door hasp can be loosened and adjusted if needed (**Figure 8**).



Figure 7



Figure 8

Buy Winston service parts online!
Factory direct at www.winstonparts.com